


9.7LTA IRRIGATION

268 HP @ 1800 rpm – NG

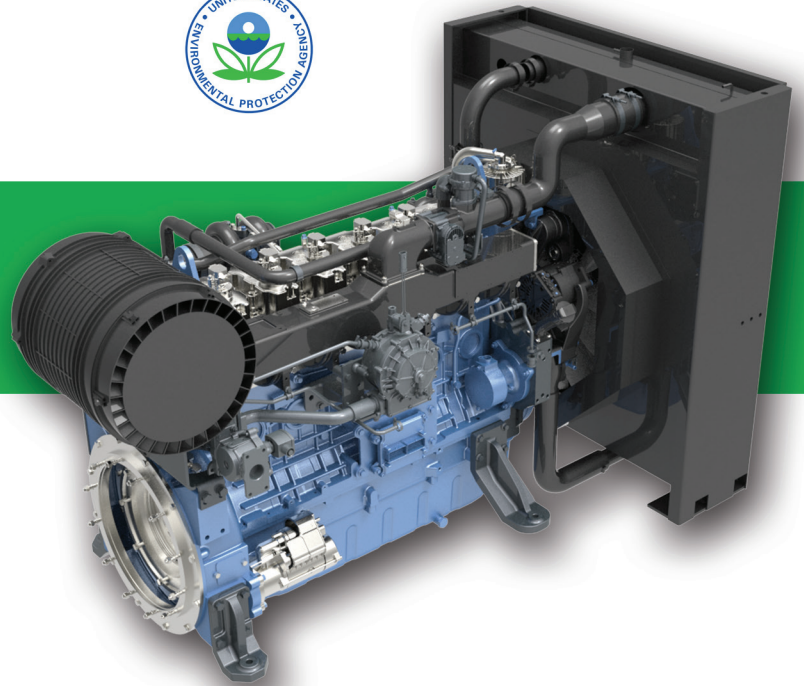

FEATURES

Engine & Block

- Cast Iron Block
- One-piece forged crankshaft
- Separate cast iron cylinder heads and replaceable dry cylinder liners
- Forged Connecting Rod

Cooling System

- Radiator and hoses supplied separately
- Thermostatically-controlled system with belt driven
- Water pump and Pusher/Puller fan

Lubrication System

- Flat bottom high capacity oil pan (32 L)
- Spin-on full-flow oil filter
- Maintenance free breather system

Engine Control System

- Proven ECM, Fuel System and Engine Control
- Engine Protection
- CANBUS J1939 Standard Interface
- Telematics Compatibility

Air Intake & Exhaust System

- Rear Mounted, Replaceable Dry Air Cleaner
- Air Cleaner Restriction Indicator

Electrical System

- 24V electric starter motors
- Optional low voltage battery charging alternator

Flywheel & Housing

- SAE 1/SAE 3 flywheel housing and 11.5/14" flywheel

Weichai America Corp.
 3100 Golf Road
 Rolling Meadows, IL 60008
 Phone: 1-847-725-0300
www.weichaiamerica.com

9.7-LITER ENGINE DATA

Model Number	WP10GTA
Bore & Stroke	4.96 in x 5.12 in (126 mm x 130 mm)
Displacement	594 cid (9,726 cc)
Cylinders	6
Compression ratio	10.5:1
Governor Method	ECM
Fuel Type	Natural Gas / Propane
Aspiration	TA
Emission Standard	EPA Certified
Dry Weight	1,929 lb (875 kg)

POWER RATINGS (PRIME)

	NATURAL GAS		PROPANE	
	kW	HP	kW	HP
1800 RPM	200	268	168	225

